3P Kompakt Filter

3P Technik

Item #1000100

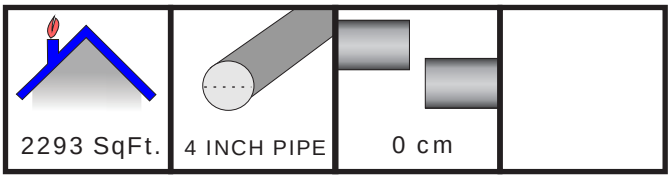

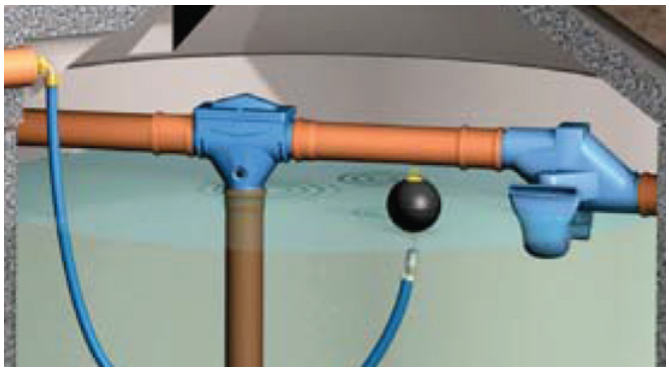

How it works:

1. Rainwater is let into the filter cartridge
2. The filter cartridge cleans the rainwater, the cleaned rainwater exits out the bottom of the filter.
3. Because of the smooth surface structure of the filter, dirt, leaves and particulates exit out the side.

PRODUCT OVERVIEW

The Smallest Rainwater Filter of 3P Technik for the installation in rainwater tanks. The 3P Compact Filter is to use where there is little room and no height difference between inlet and outlet. Retro-installation of 3P Backwashing Device PF plus SF is possible. The 3P Compact Filter is ideally suited for use in conjunction with a 3P Overflow Siphon Duo and the 3P Calmed Inlet.

Rainwater is led onto the filter cartridge

Low maintenance, due to the self cleaning design

Food grade high quality polyethylene construction

Cleaned water can be used in washing machines, toilet flushing and garden watering, in homes, in commerce, in public buildings and in industry

Low maintenance, depending on the contamination.

Housing material: Food Quality Polyethylene

For roof areas up to 2293 sqft.

Flow Rate: 1.69 gal per second.

All connections 4 inch.

Height difference of 0 mm between rainwater inlet and wastewater outlet.

Material filter cartridge: Stainless steel 1.4301

Mesh Size: .07 x 1.7 mm 650 Micron

Weight: 11.40 lbs.

Dimensions In Inches: H10.24 W12.60 D11.62

The cleaned water can be used in washing machines, toilet flushing and garden watering, in homes, in commerce, in public buildings and in industry.

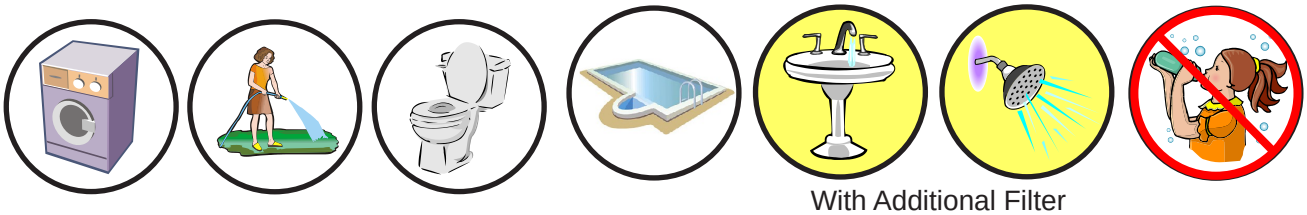

With Additional Filter